


HFGA128H

HIGH SPEED DIRECT WARPING MACHINE

HFGA128H高速分批整经机

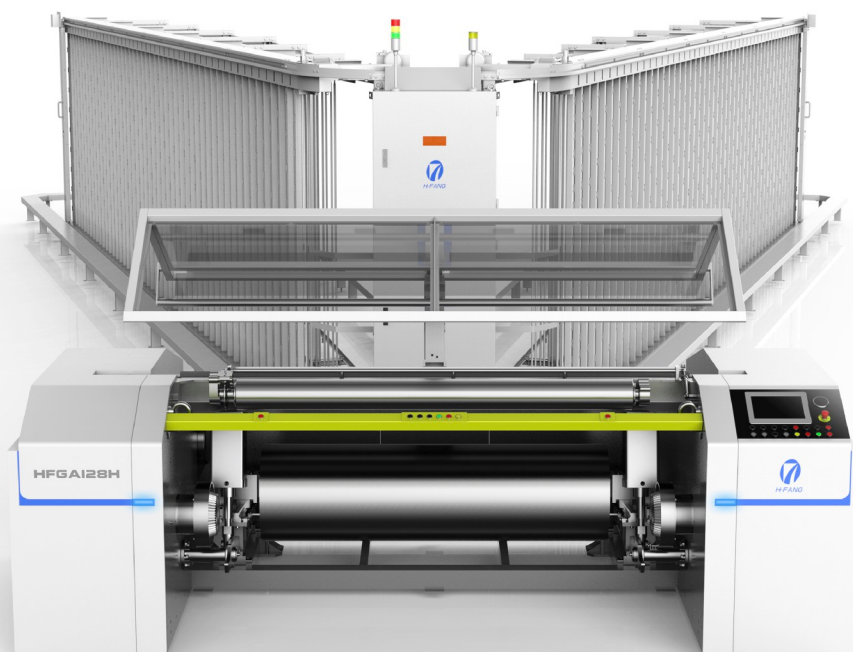

■ **HFGA128H 高速分批整经机**适用于棉、麻、化纤及混纺纤维。根据工艺要求，可设定经轴卷取速度，压纱辊气压压力，获得所要求的密度。设备高速高效，传动精度高，结构简单，操作简便，高度智能化，平行加压，更好成形，压辊调节，经轴适应性强，自带工艺参数库，方便用户快速掌握整经工艺。

■ **HFGA128H High Speed Direct Warping Machine** is workable for cotton, hemp, polyester and blended fiber. Beam winding speed, press roller pressure can be set according to process to achieve required density. Machine has high speed and efficiency, high drive accuracy, simple structure, easy operation, high intelligence, parallel press form for better beam, press roller can be adjusted, workable for various kinds of beams, user can easily master warping process with machine process data library.

江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.



地址：江苏省江阴市周庄镇长寿西张路11号

11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

营销中心 Sales Center



纺纱 13601520896

织造 13601522692



(0510) 86361850

(0510) 86366213



zlq@h-fang.com

ztl@h-fang.com

华方国贸 Overseas Dept.



0510-86360066




info@h-fang.com



www.h-fang.com


HFGA128H 高速分批整经机

HIGH SPEED DIRECT WARPING MACHINE

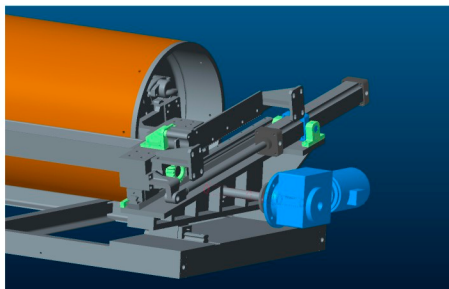


压辊左右微调装置
Fine adjust device on right and left side of press roller

通过减速电机可调整压辊与经轴盘片之间的距离
Distance between press roller and beamflange can be adjusted by gear motor

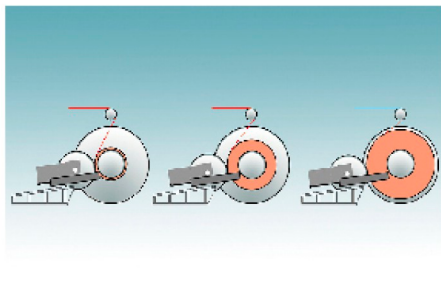

玻璃钢压辊平行加压
Parallel press form of FRP press roller

通过气缸推拉,使压银沿直线导轨滑动给经轴提供压力
Press roller travels along the linear guide rail which is controlled by cylinder to provide pressure on the beam

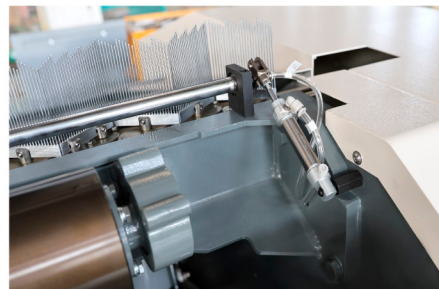

防交叉装置
Cross protecting device

主要技术参数

Main Technical Parameters

盘片直径(mm)	Beam diameter	800	1000	1250	1400
最大速度(m/min)	Max.Working speed	1000			
有效幅宽(mm)	Working width	1400-2800			
加压形式	Press form	气动平行加压 Pneumatic parallel press			
上下轴	Load/unload	无No	标配 Standard	标配 Standard	标配 Standard
设备尺寸	Machine size				
长(mm)	Length	2120+幅宽 Working width			
宽(mm)	Width	1860	1980	2130	2370
高(mm)	Height	1800	2000	2250	2550

