

# HFGA135D

## REBEAMING MACHINE

## HFGA135D分经机



- 本机将集束染色后的束状经纱分开成片状纱，经伸缩人字箱排列均匀整齐后卷绕在经轴上，是提供牛仔布用纱的织前准备设备。可根据工艺要求设定卷取速度、恒线速度、张力及定长。
- 产品特点：分纱单纱张力范围大，张力控制均匀，操作简单，根据操作习惯，多种配置可供选择，自带工艺参数库，方便用户快速掌握整经工艺。

- This machine is applied to distribute rope warp into sheet warp, evenly wound on beam through expansion reed, is a preparatory machine before denim fabric weaving. Winding speed, linear speed, tension and length can be set according to process requirement.
- Machine functions: wide single yarn tension range, uniform tension control, easy operation, optional parts can be provided according to user habits, user can easily master warping process with machine process data library.

## 江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

 江苏省江阴市周庄镇长寿西张路11号  
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province


 137 0616 1133

 0510-86366213


 0510-86366212

 zzj@h-fang.com

 www.h-fang.com

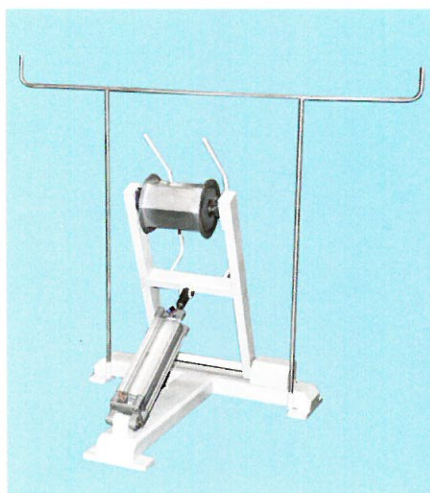

缓冲装置  
Buffering device

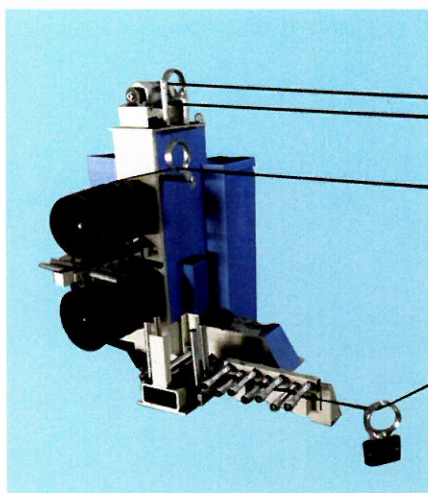

张力架  
Tension frame



上倒车  
Upper reversing

## 主要技术参数

### Main Technical Parameters

|                           |                   |                               |
|---------------------------|-------------------|-------------------------------|
| 整经有效幅宽 (mm)               | Working width     | 1600、1650、1800                |
| 经轴盘片直径 (mm)               | Beam diameter     | 800、1000                      |
| 整经速度 (m/min)              | Warping speed     | 500                           |
| 制动距离 (m)                  | Brake distance    | ≤1.5 (最高速度时) at highest speed |
| 卷绕密度 (g/cm <sup>3</sup> ) | Winding density   | 0.3-0.65                      |
| 外形尺寸                      | Overall dimension |                               |
| 长 (mm)                    | Length            | 2124+ 幅宽 Working width        |
| 宽 (mm)                    | Width             | 1950                          |
| 高 (mm)                    | Height            | 2600                          |

